


Two-part clip curtain profile with "maxi" running groove, VS57 standard



Aluminium, matt, RAL 9016

Stock lengths of 6 m

"maxi" accessories

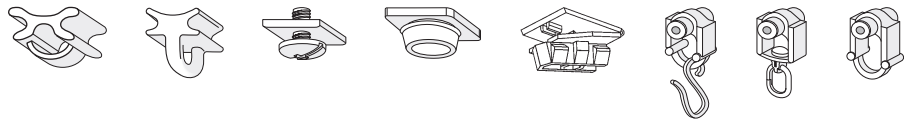

Installation accessories



Services

Curved designs, cut to fixed dimensions including opening

Bending service

Plan view (seen from above). State room side.




Radii: from 200 mm
90° angle or angle of your choice



Non-standard radii and angles as per sketch

Installation

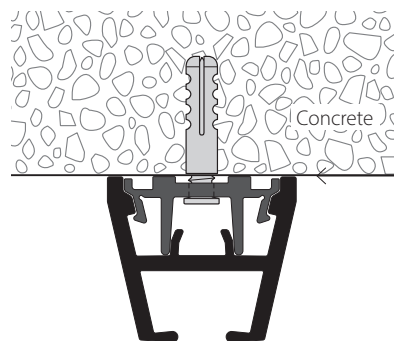


Caution: pay attention to profile position

Fixings approx. every 30-40 cm

Article description

Order no.



Two-part clip curtain profile
with "maxi" running groove, VS57 standard
for heavy curtains with roller gliders
Aluminium, natural anodised

230.21




Aluminium, white, RAL 9016
Stock lengths of 6 m

Made-to-measure + 20%

**Side cap S230**


Aluminium, matt

11030.21



Eyelet roller
with shaft

25287



Eyelet roller
with rotatable eyelet

25288



Eyelet roller
with hook

25289

Bending service

Plan view (seen from above). State room side.



Radii: from 120 to 200 mm

95200.1

Radii: up to 500 mm

95200.2

Radii: up to 1000 mm

95200.3

90° angle or angle of your choice



Non-standard radii and angles as per sketch

95200.4


Price - T&M basis

Plan view drawing




Ordering information


- The profile is always seen from above with the glide channel at the bottom
- With profiles with clamping bolt assembly, please state room side
- Radii are always understood as being from the inside of the profile
- Curved designs cannot be returned in the event of incorrect dimensions
- Special bends only with 1:1 template




Dimensions: external and view from above

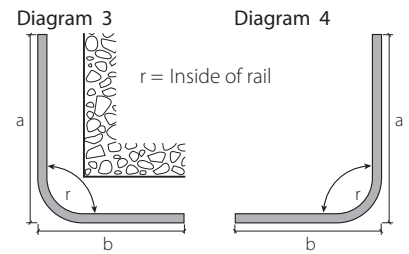

Dimensions: external and view from above

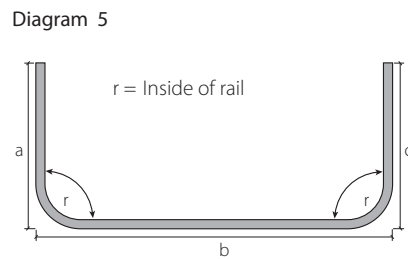

Dimensions: external and view from above

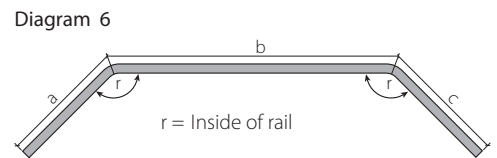

Dimension a: End of profile to centre of radius/ bend
 Dimension b: Centre of radius to centre of radius
 Dimension c: Centre of radius to end of radius

Dimensions: external and view from above


Montage




1. The base profile has the same length as the curtain profile.




2. In the case of difficult ceilings, fewer base profile pieces can be used.

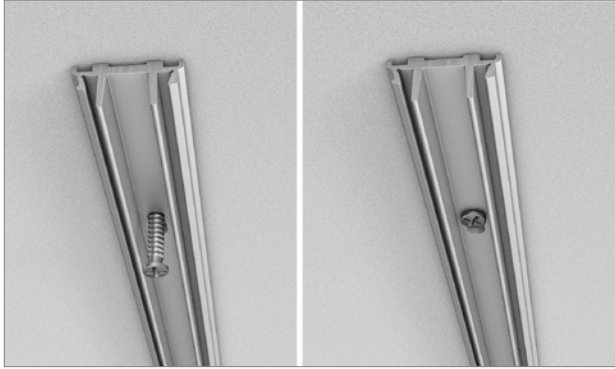


3. Secure to the existing holes in the ceiling.

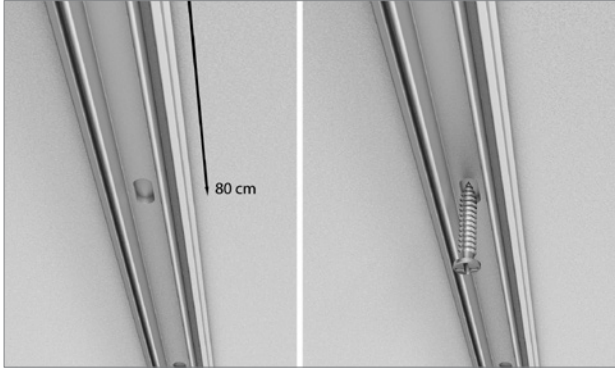

4. Approximately every 80 to 100 cm.

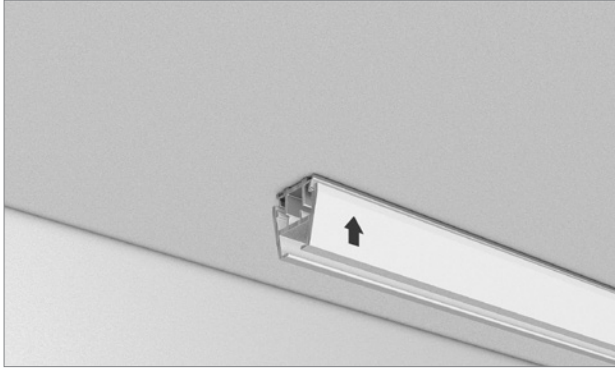

5. Position the curtain profile over the base profile and snap in over the entire length.

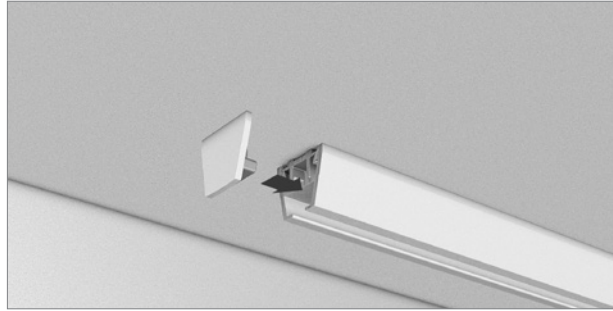

6. Attach cap to each end.



7. Tighten the grub screw.